



PCT/GB 2003 / 0 0 0 9 6 3

10/506639



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 04 JUN 2003

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

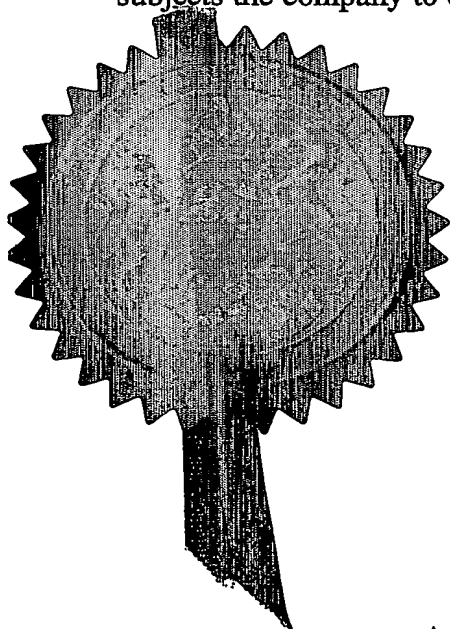

Signed

Stephen Hendley

Dated 1 May 2003

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY



INVESTOR IN PEOPLE


GB 0206563.9

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

JAY COUSINS,
61 Nethergreen Road,
SHEFFIELD,
S11 7EH,
United Kingdom

[ADP No. 08236440002]

Patents Form 1/77

Patents Act 1977
(Style 16)The
Patent
Office

effective

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

P71916GB1

2. Patent application number

(The Patent Office will fill in this part)

0206563.9

20MAR02 1745145 1 002073
P01/7700 0.00-0206563.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sheffield Hallam University
City Campus
Howard Street
Sheffield
S1 1WB, United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Foldable Cup

5. Name of your agent (if you have one)

"Address for service" in the UK to which all correspondence should be sent (including the postcode)

Harrison Goddard Foot
Fountain Precinct,
4th floor
Leopold Street,
Sheffield
S1 2QD

Patents ADP number (if you know it)

7914237001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

UK

0205392.4

7.3.2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if)

- a) any applicant named in part 3 is not an inventor, or
 b) there is an inventor who is not named as an applicant, or
 c) any named applicant is a corporate body.
 See note (d))

yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	3
Abstract	1
Drawing(s)	6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

19 March 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Vanessa J Potter

0114 274 3700

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

FOLDABLE CUP

Field of the Invention

The invention relates to containers made from a one-piece flat sheet, made of for instance, waterproof material so that the containers may be used to hold both liquids and
5 solids. In particular the invention relates to containers made from a one-piece flat sheet having an integral handle.

Background to the Invention

Foldable containers are known for use as vessels such as cups for holding drinks or foods
10 for personal consumption. Such foldable containers are either simple in structure in which case they will not retain their folded condition without hand or finger pressure being applied to them, or they are relatively complex structures including clamps or other devices for attaching to the folded container body in order to maintain its folded condition.

15

Furthermore, such containers are rarely provided with a handle to facilitate the handling of the container whilst it contains hot food or drinks. In the case where a handle is provided, it is a separate piece that requires attachment to the container body.

20 There is a need for a simple foldable container having an integral foldable handle, which may be maintained in its folded condition without using a separate fastening or other element which add to the overall complexity and cost of the article.

Statement of Invention

According to the present invention there is provided a foldable cup comprising a sheet of material having a container piece integral with at least one handle piece, said container piece having fold lines enabling it to be transformed from a flat condition into a folded container, and said handle piece having fold lines enabling the handle piece to be formed into a handle extending from and held in position relative to the container.

In a preferred embodiment the cup comprises one integral handle piece. In an alternative embodiment the cup comprises two integral handle pieces.

10

Preferably the handle comprises fold lines that define a central gripping section. More preferably, the handle is formed by folding the handle piece about said fold lines thereon and then retaining the formed handle to the container by the folding interaction of the formed handle and container. Alternatively the handle is formed by folding the handle piece about said fold lines thereon and then retaining the formed handle to the formed container by the use of integral fastening means.

15

In a preferred embodiment said folded container is formed by folding the container piece about fold lines thereon. Preferably said container piece fold lines define at least two corner pieces. More preferably said at least two corner pieces are folded across one another and secured by an integral fastening means.

20

Preferably, the integral fastening means are mating connection elements, more preferably press-stud fastenings. In an alternative embodiment said integral fastening means is said formed handle.

- 5 In a preferred embodiment said container piece fold lines define at least face, over which said at least two corner pieces can be folded and fastened. Preferably the container piece fold lines define a self-supporting base.

In a preferred embodiment, the container piece comprises a sheet of material substantially
10 dodecagonal in shape. Preferably said sheet of material is a waterproof material. More preferably, the material is a plastics material, for example polypropylene. Preferably, the material is sufficiently flexible that it may be readily folded about fold lines scored into it.

15 **Brief Description of the Drawings**

The invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a plan view of the cup having a container portion and a handle portion, in its unfolded flat condition;

20 Figure 2 shows the container portion of figure 1 being assembled by a user;

Figure 3 shows the handle portion of figure 1 being assembled by a user;

Figure 4 shows the cup of figure 1 in a folded formation;

Figure 5 shows a plan view of the cup in accordance with a second aspect of the present invention in its unfolded flat condition; and

Figure 6 shows a plan view of the cup in accordance with a second aspect of the present invention in its unfolded flat condition, the cup having a container portion and
5 two handle portions.

Detailed Description of the Invention

Referring to figure 1 of the accompanying drawings, a foldable cup is illustrated in its unfolded flat condition. The cup comprises a sheet of material 1, said sheet further
10 comprising a container piece 2 and a handle piece 3. The sheet 1 is provided with a plurality of fold lines which have been scored into the body of the sheet.

The container piece 2 is dodecagonal in shape. By "dodecagonal" is meant that the shape is a twelve-sided figure having the general shape shown in figure 1, rather than the shape
15 of a regular dodecagon. In an alternative embodiment, the shape could be hexagonal or any other suitable shape. The container piece 2 is provided with inner fold lines 5, which define a self-supporting base 6. In the present embodiment, the self-supporting base 6 is rectangular in shape, comprising two long fold lines 5' and two short fold lines 5".

Alternatively the self-supporting base 6 is any other suitable shape. By "self-supporting",
20 is meant that, when the cup is in its folded condition, the base 6 allows the cup to stand upright without the need for external support.

A fold line 7 extends from each corner of the self-supporting base 6. Each fold line 7 extends to a corner of one of two sides of the dodecagon which are each parallel to one of two opposing fold lines 5 of the self supporting base 6. In the present embodiment said two opposing fold lines 5 are the two shortest fold lines 5'' of the rectangular self supporting base 6. Fold lines 7 also define the two faces of the cup, 8 and 9.

A second fold line 10 extends from each corner of the rectangle 6. Each second fold line 10 extends to a corner that is itself adjacent to one of the corners joined by a fold line 7 (the corner joined by fold line 10 being one which itself is not joined by a fold line 7). The fold lines 10 and 7 define a corner piece 11. In the present embodiment there are provided four corner pieces, each generally triangular in shape. The fold lines 10 also define two side pieces, 14 and 15.

The face 8 is provided with a press stud 12. The two corner pieces 11 and 11' adjacent to the face 8 are each provided with hole 13' and 13'' respectively, positioned such that when folded across the front of the face 8 each hole accommodates the press-stud 12. The side piece 14 is provided with a hole 13 positioned such that when the corner piece 11, (which is adjacent to both the face 8 and the side piece 14) is folded, using fold lines 7 and 10, towards the face 8, the hole 13 is aligned with and can accommodate the press stud 12. The side piece 15 is provided with a press stud mating part 16. The press stud mating part 16 is positioned such that, when the corner piece 11', is folded using the fold lines 7 and 10 towards the face 8, the three holes 13, 13' and 13'' are aligned with and

can accommodate the press stud mating part, such that it can meet and be snapped together with the press stud 12.

The handle piece 3 is integral with the edge of the dodecagon which defines the edge of the face piece 9. The handle piece extends from the two corners 23 and 24, that define said edge. The handle piece 3, is provided with three fold lines 17, 17' and 17'' which traverse the width thereof. The fold lines 17, 17' and 17'' divide the handle 3 into four sections: an upper handle piece 18, a central gripping section 19, a lower handle piece 20 and a tongue 21.

10

A spine 26 is located in the central gripping section 19. In the present embodiment the spine 26 is rectangular in shape. Alternatively the spine could be any other suitable shape. The spine 26 is defined by two parallel fold lines 27. The two lines 27 form the two longest sides of the rectangular spine 26, and each extend longitudinally from the fold line 17 to the fold line 17'. A gripping surface 31 is disposed on either side of the spine 26. The upper handle piece 18 is provided with two fold lines 22 which extend from the corners 23 and 24 to the fold line 17. Adjacent to each fold line 22 is an edge piece 32. The fold lines 22 connect the fold line 17 to form an upper short edge 25 of the spine 26. Two further fold lines 28 define the lower short edge 29 of the spine 26. The two fold lines 28 extend from the two corners of the lower short edge 29 of the spine 26 across the lower handle piece 20 and extend to the two ends of the fold line 17''. Adjacent to each fold line 28 is an edge piece 33. The edge pieces 32 and 33, along with the gripping surface 31 form a side panel 34.

15

20

20. MAR. 2002 11:00 AM
A tongue 21 is located below the fold line 17'. The tongue has curved edges 30 at the end thereof. The width of the tongue 21 is not greater than the than the shortest side of the self supporting base 6. In an alternative embodiment the width of the tongue bows
5 outwards towards the center thereof, the width of the bottom leading edge of the tongue not exceeding the shortest side of the self supporting base 6.

Figure 2 illustrates the container piece 2 being folded to form a container. The two corner pieces 11 and 11'' adjacent to the face 8 are folded towards the exterior of face 8. The
10 corner piece 11 adjacent to the side piece 14 is folded towards the face 8 first. In folding the corner piece 11 towards the face 8, the side piece 14 is curved towards the face 8 and the holes 13 and 13' of the corner piece 11 and the side piece 14 respectively, align such that the press stud 12 on the exterior of the face 8 is exposed therethrough. The corner piece 11' is then folded across the face 8, overlapping part of the corner piece 11. The
15 hole 13'' is aligned with the holes 13 and 13' and exposes the press stud 12 therethrough. In folding the corner piece 11' across the face 8, the side piece 15 is curved across the face 8, the mating press stud part provided on the top side of the side piece 15 aligning with the holes 13, 13' and 13'' such that the press stud parts 12 and 16 meet and can be snapped together, causing the front face 8 and two side faces 14 and 15 to extend
20 upwards from the fold lines 5 of the self supporting base 6.

Figure 3 illustrates the handle piece being folded to provide a leak proof container having a handle capable of supporting the container when the container is filled with food or

beverage. The corner pieces 11'' and 11''' are folded one over the other across the exterior of the face 9. This creates a leak proof container. The corner pieces 11'' and 11''' are secured to the face 9 by the insertion of the tongue 21 of the handle 3 beneath both of the overlapping corners. This positions the upper handle piece 18, the central gripping section 19 and the lower handle piece 20 over the overlapping corners 11'' and 11''', retaining them in the folded position. The application of a pinching action by the user to the gripping surfaces 31, displaces the edge pieces 32 and 33, such that the gripping surfaces oppose one another creating a handle. The interaction between the tongue 21 and the corner pieces 11'' and 11''' is such that the side panels 34 are deformed by a reduction in their overall length causing the handle to be retained even upon removal of the pinching force by the user.

Figure 5 illustrates an alternative embodiment in which the fold lines 7' and 7'' each extend to a corner of one of the two sides of the dodecagon which are each parallel to one of the two longest opposing fold lines 5 of the rectangular self supporting surface 6. This forms a front piece 41. The front piece 41 is provided with press studs 42. The fold lines 10', 10'' and 7', 7'' act to define corner pieces 44.

Each side piece 14 and 15 is provided with a press stud mating part 40. Each corner piece 44 is provided with a hole 43 positioned such that when folded across the front of the adjacent side piece 14 or 15, as the case may be, each hole 43 accommodates the a press-stud 42. Each press stud mating part 40 is positioned such that, when a corner piece 44, is folded using the fold lines 7 and 10 towards one of the side pieces 14 or 15, the hole 43 is

Figure 6 illustrates a further embodiment in which the container piece 2 is provided with a second handle piece 3' integral with the edge of the dodecagon which defines the edge of the face piece 8. The corner pieces 11 and 11' are folded towards the face 8 and retained in a folded position by the interaction of the folded handle 3', the face 8 and the folded corner pieces 11 and 11'. This provides a two-handled container which removes the need for fastening elements, the exclusion of which may add to the manufacturing expense. In the present embodiment the cup can be manufactured from only a single sheet of material.

Claims

1. A foldable cup comprising a sheet of material having a container piece integral with at least one handle piece, said container piece having fold lines enabling it to be transformed from a flat condition into a folded container, and said handle piece
5 having fold lines enabling the handle piece to be formed into a handle extending from and held in position relative to the container.
2. A foldable cup according to claim 1, wherein the cup comprises one integral handle piece.
- 10 3. A foldable cup according to claim 1, wherein the cup comprises two integral handle pieces.
4. A foldable cup according to any preceding claim, wherein said handle piece fold lines
15 define a central gripping section.
5. A foldable cup according to any of claims 1 to 4, wherein the handle is formed by folding the handle piece about said fold lines thereon and then retaining the formed handle to the container by the folding interaction of the formed handle and container.
- 20 6. A foldable cup according to any of claims 1 to 4, wherein the handle is formed by folding the handle piece about said fold lines thereon and then retaining the formed handle to the formed container by the use of integral fastening means.

7. A foldable cup according to any preceding claim, wherein said folded container is formed by folding the container piece about fold lines thereon.
- 5 8. A foldable cup according to claim 7 wherein said container piece fold lines define at least two corner pieces.
9. A foldable cup according to claim 8 wherein said at least two corner pieces are folded across one another and secured by an integral fastening means,
- 10 10. A foldable cup according to claim 9, wherein the integral fastening means are mating connection elements.
11. A foldable cup according to claim 10, wherein the mating connection elements are
- 15 12. A foldable cup according to claim 9, wherein said integral fastening means is said formed handle.
- 20 13. A foldable cup according to claim 8 or claim 9, wherein said container piece fold lines define at least one face over which said at least two corner pieces can be folded and fastened.

14. A foldable cup according to any of claims 7 to 13, wherein the container piece fold lines define a self-supporting base.

15. A foldable cup according to any preceding claim, wherein the container piece
5 comprises a sheet of material substantially dodecagonal in shape.

16. A foldable cup according to claim 15, wherein said sheet of material is a waterproof material.

10 17. A foldable cup according to claim 16 wherein the waterproof material is a plastics material.

18. A foldable cup according to claim 17, wherein the plastics material is polypropylene.

15 19. A foldable cup according to any preceding claim, wherein the material is sufficiently flexible that it may be readily folded about fold lines scored into it.

20. A foldable cup substantially as described herein with reference to any appropriate combination of the accompanying drawings.

Abstract

The invention provides a foldable cup comprising a sheet of plastics material having a container piece integral with at least one handle piece, said container piece having fold lines enabling it to be transformed from a flat condition into a folded container, and said
5 handle piece having fold lines enabling the piece to be formed into a handle extending from and held in position relative to the container. When transformed from a flat to a folded condition, the container is folded in such a way as to provide leak proof seals, enabling the cup to safely hold both liquids and solids.

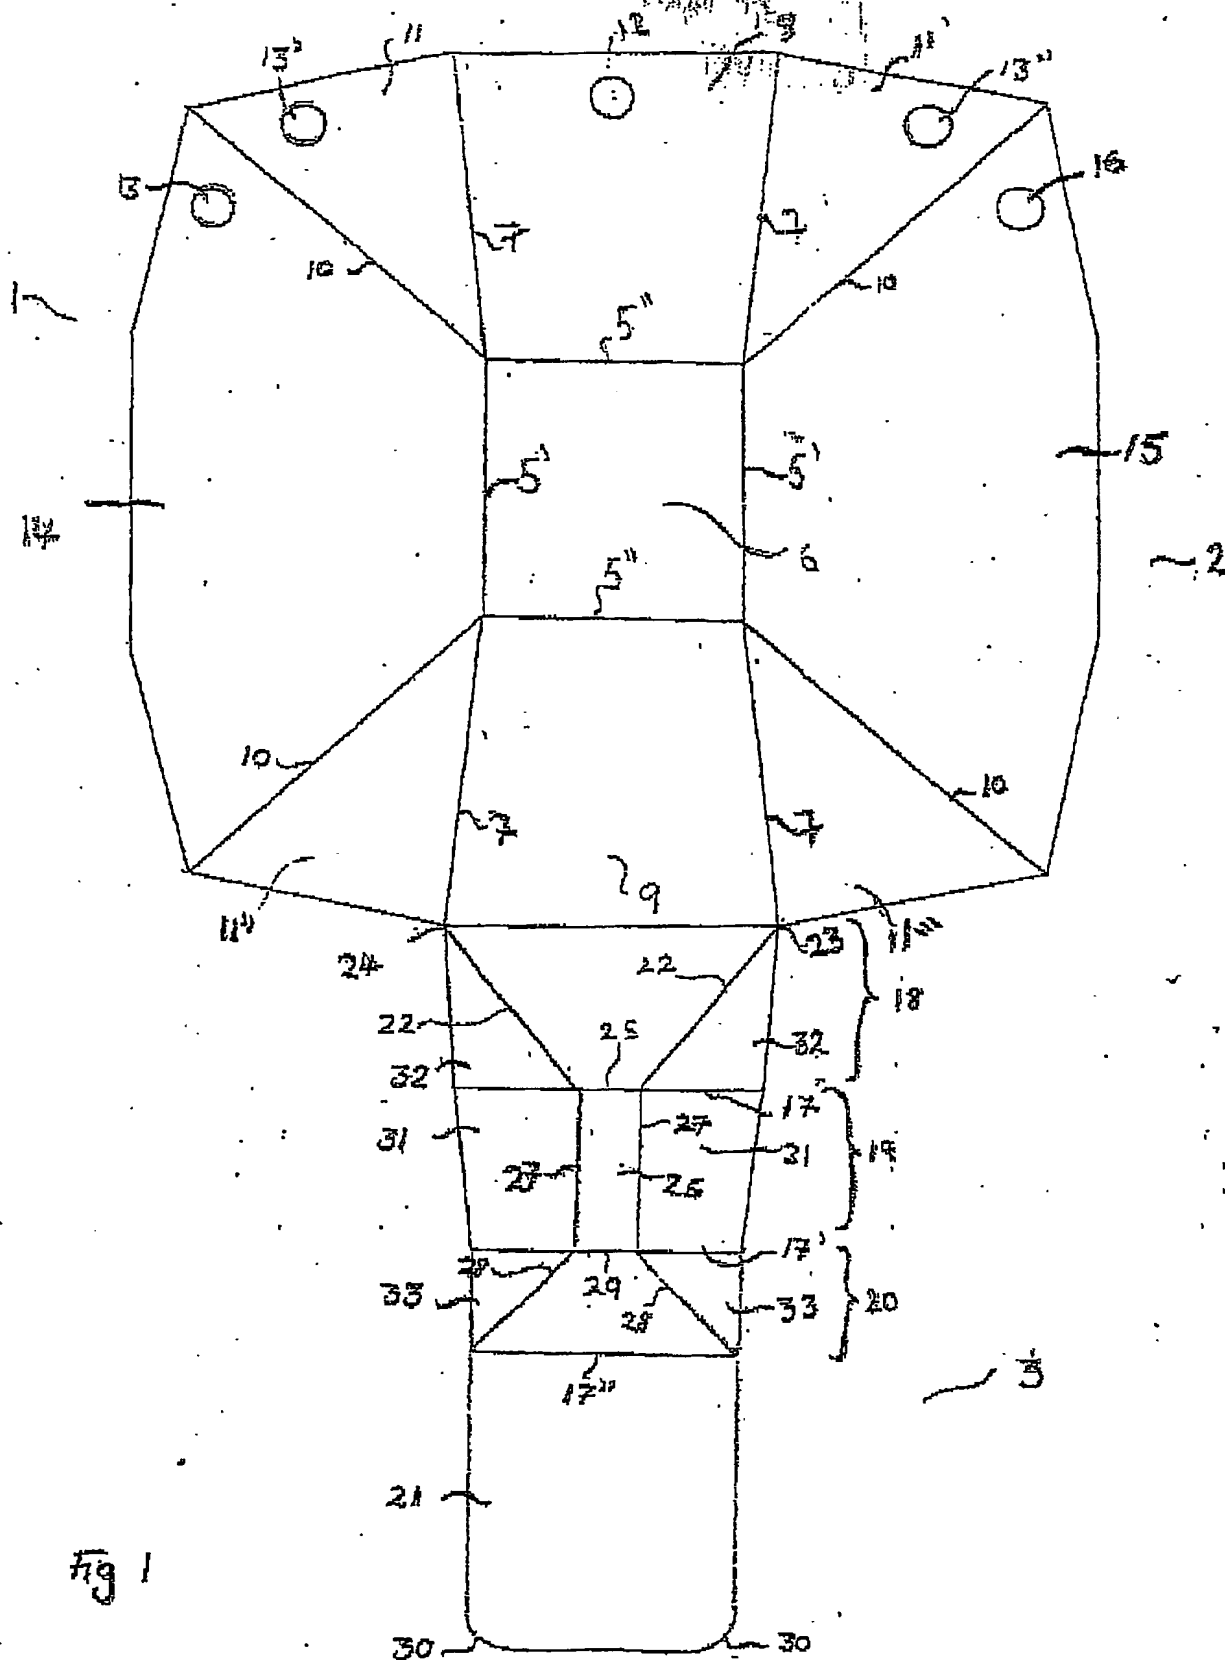


Fig 1

Fig 2

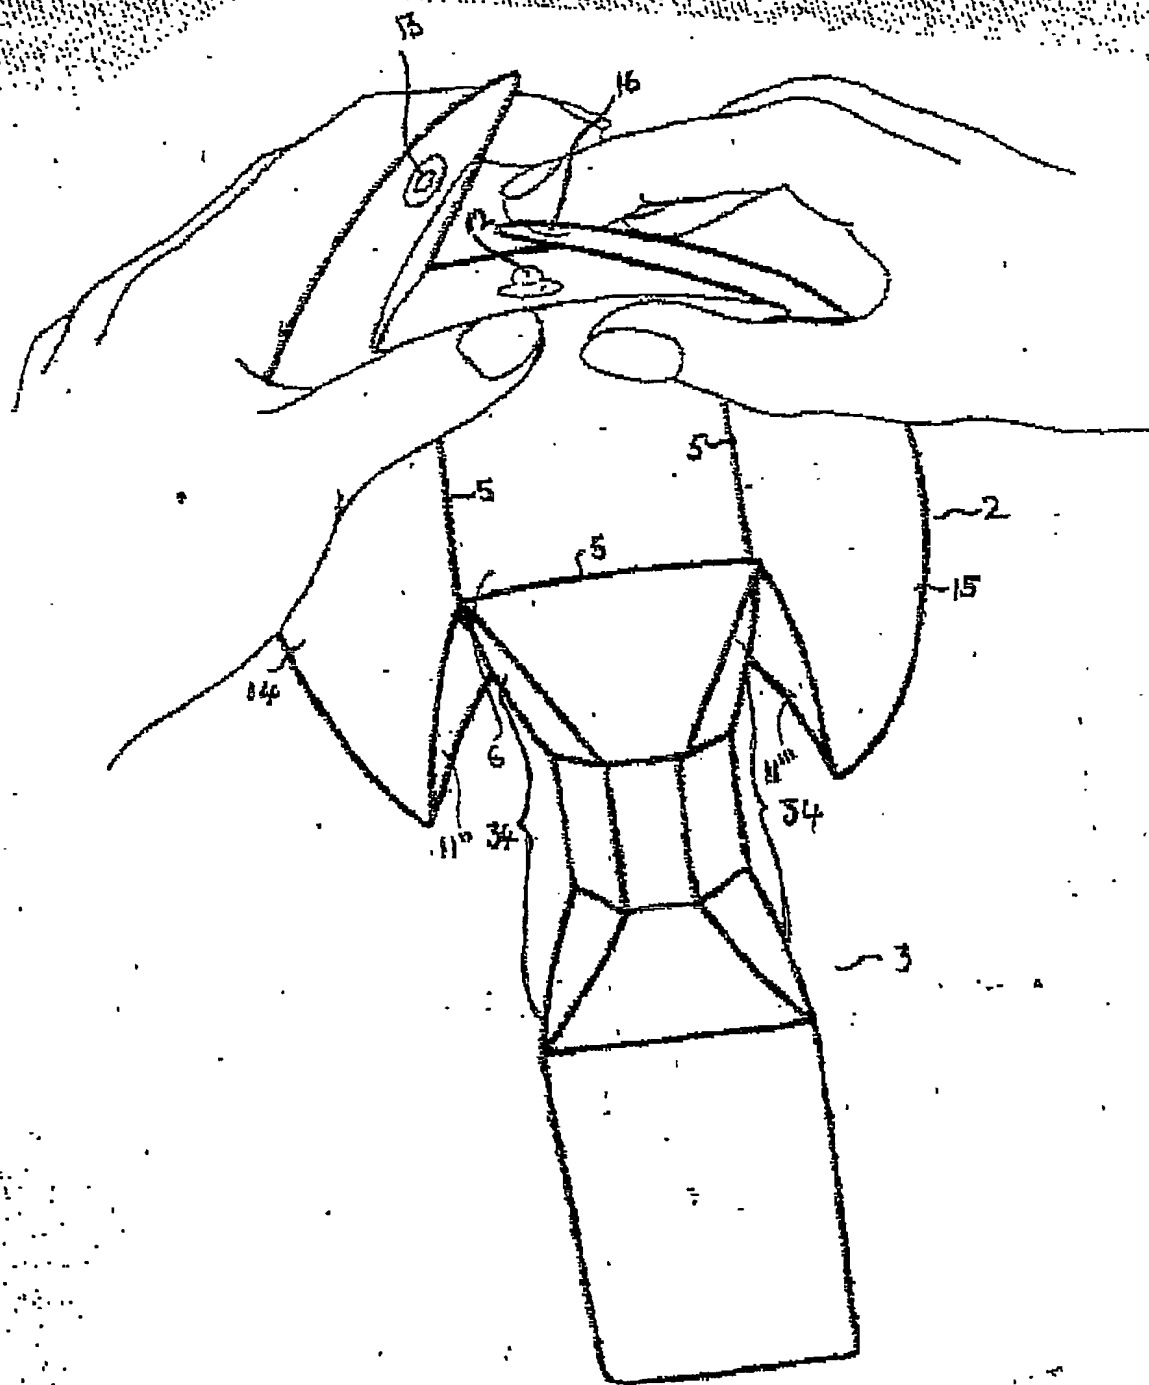


Fig 3

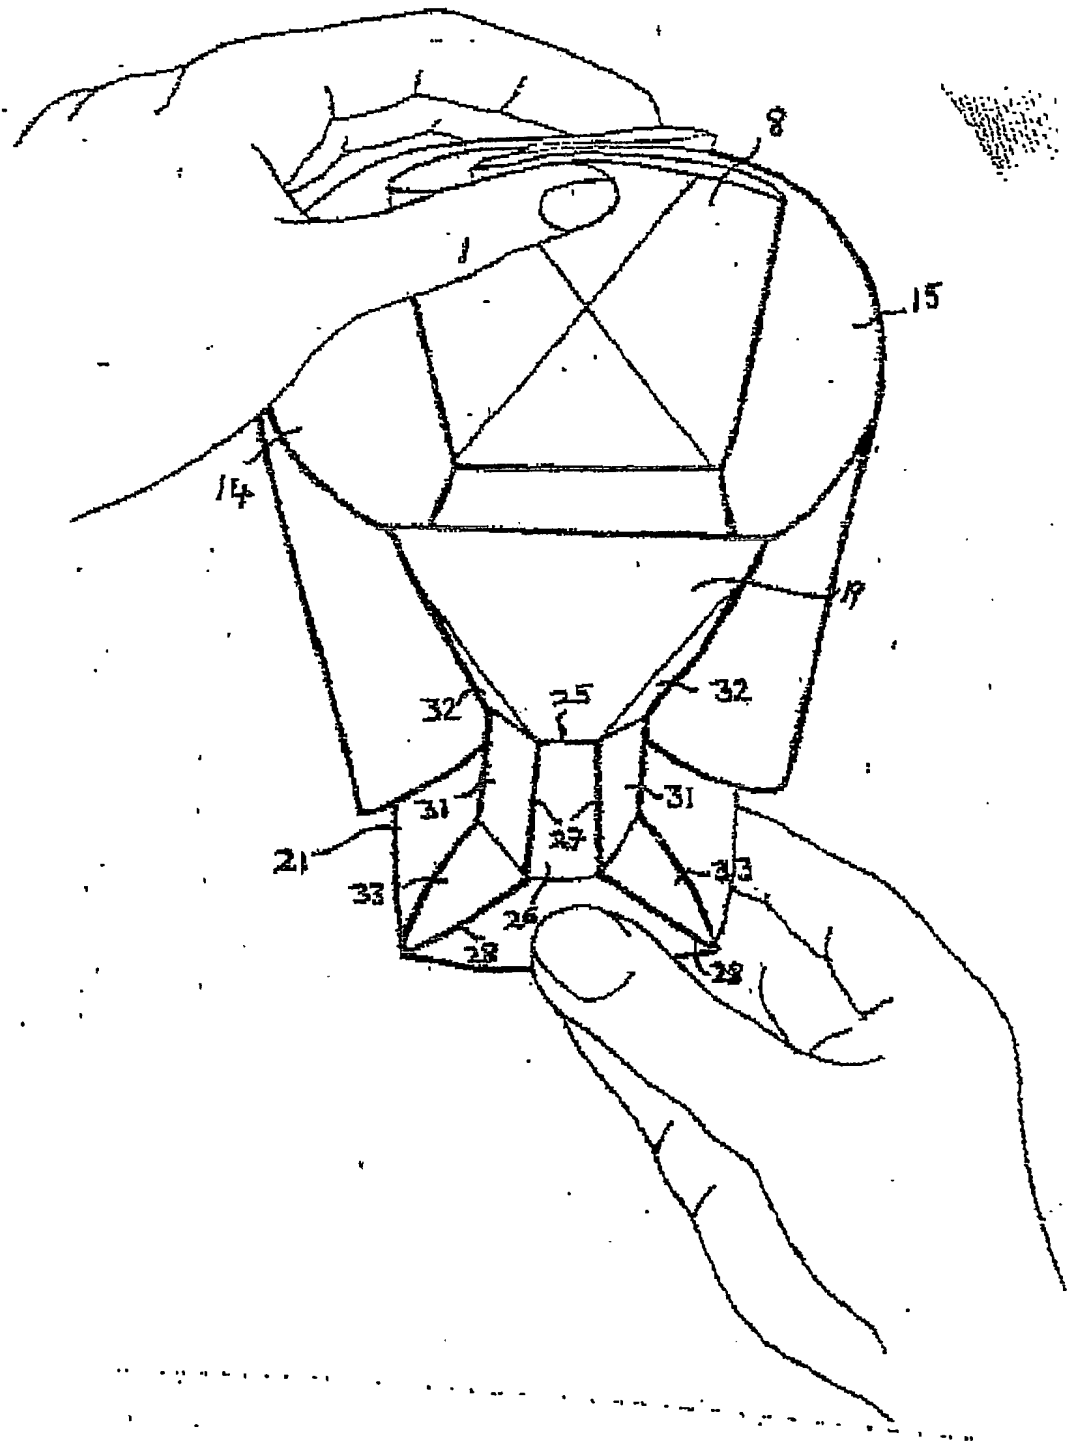
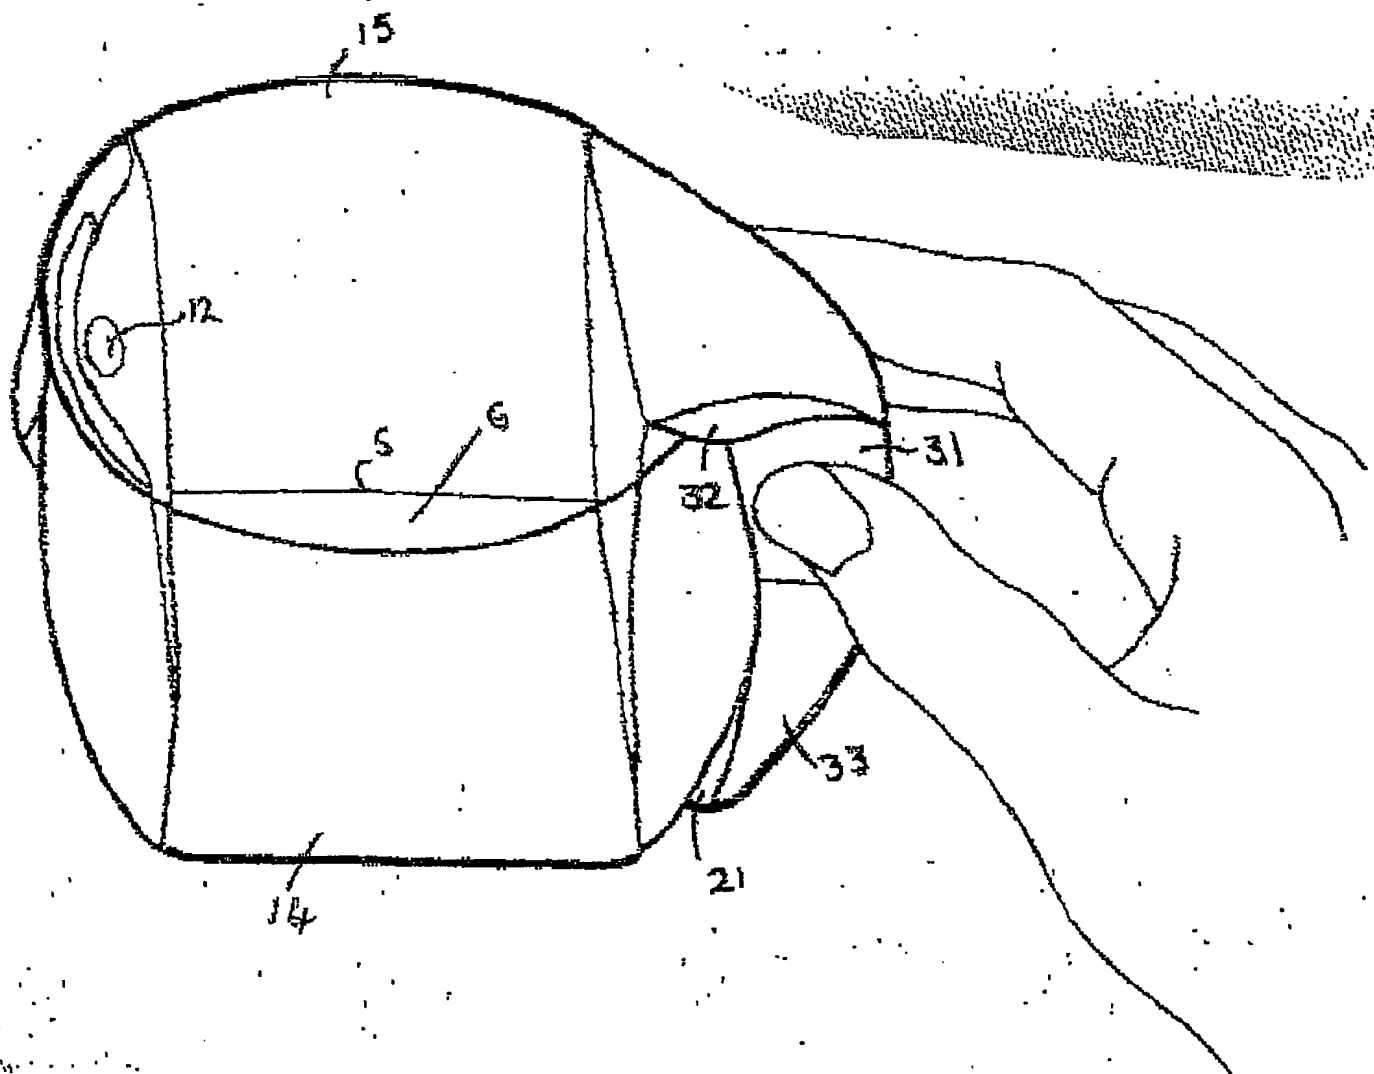


Fig 4



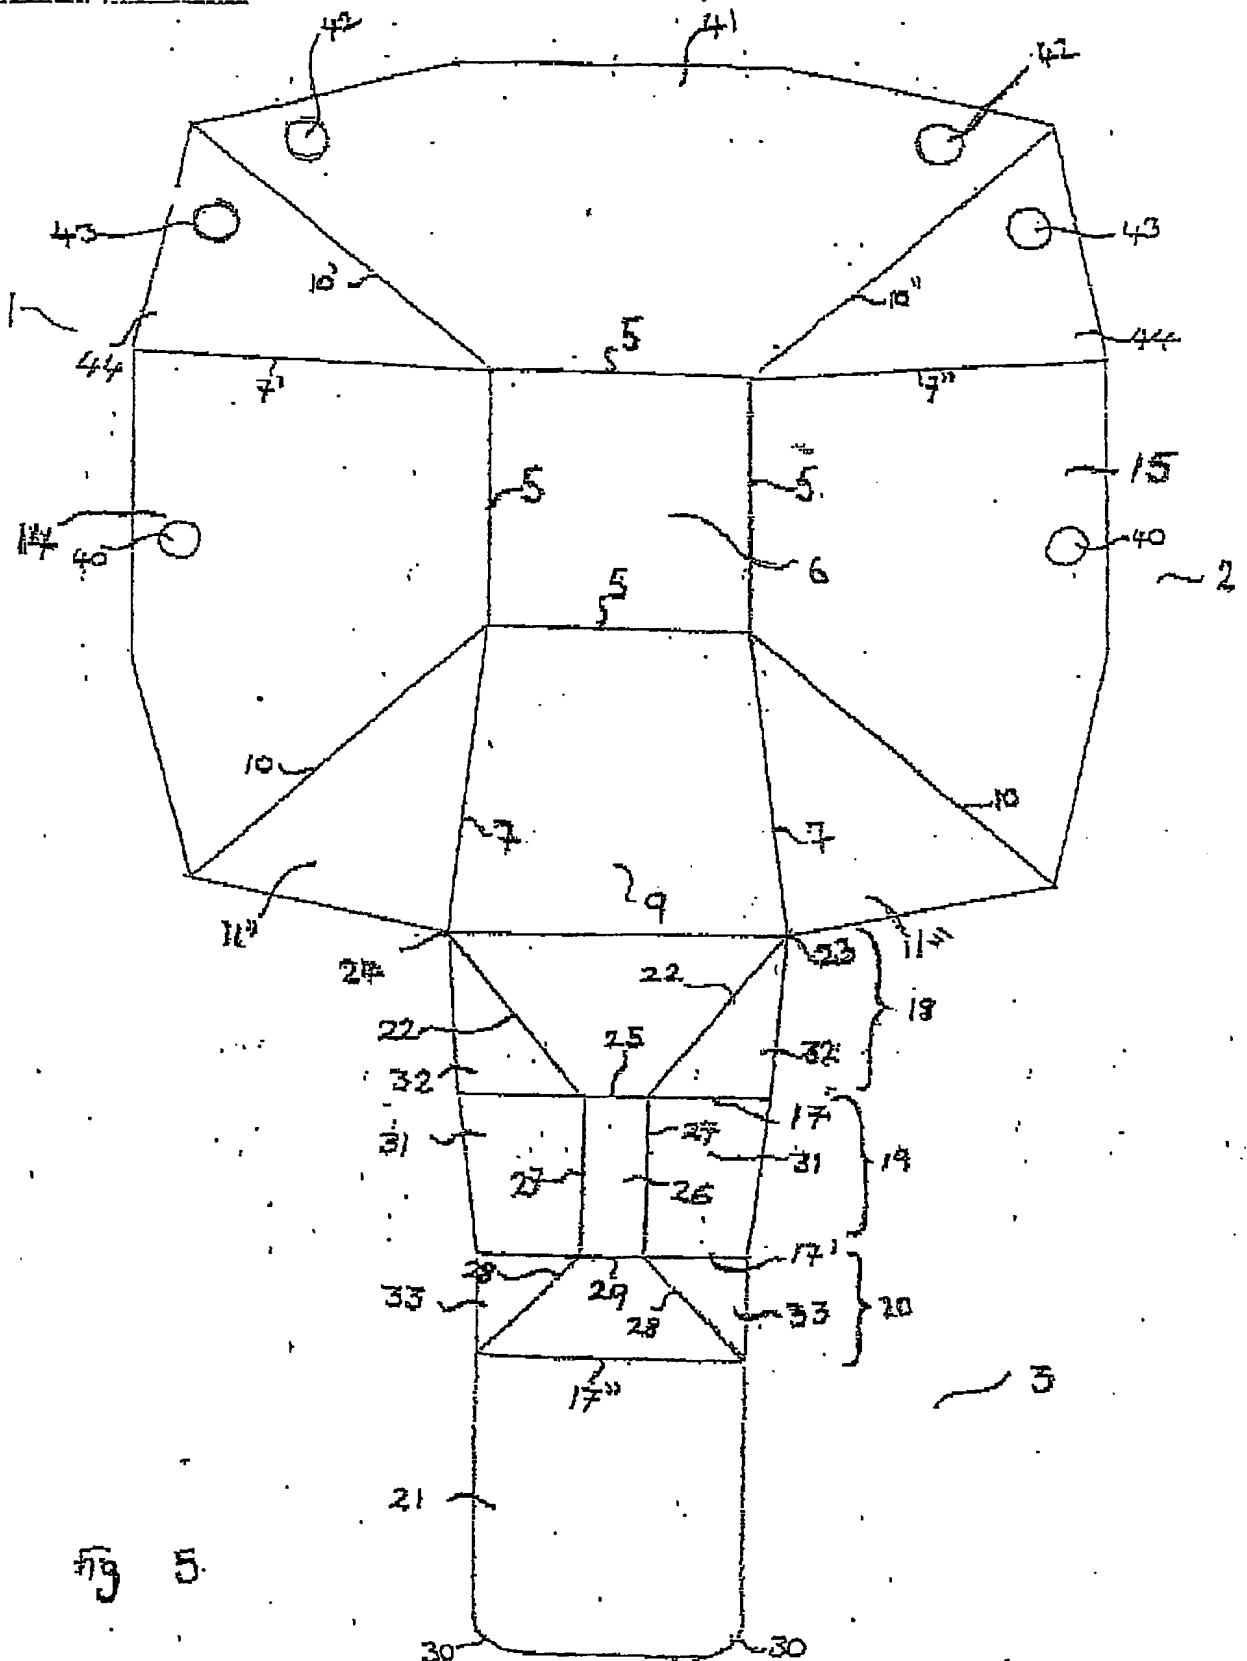


Fig 5

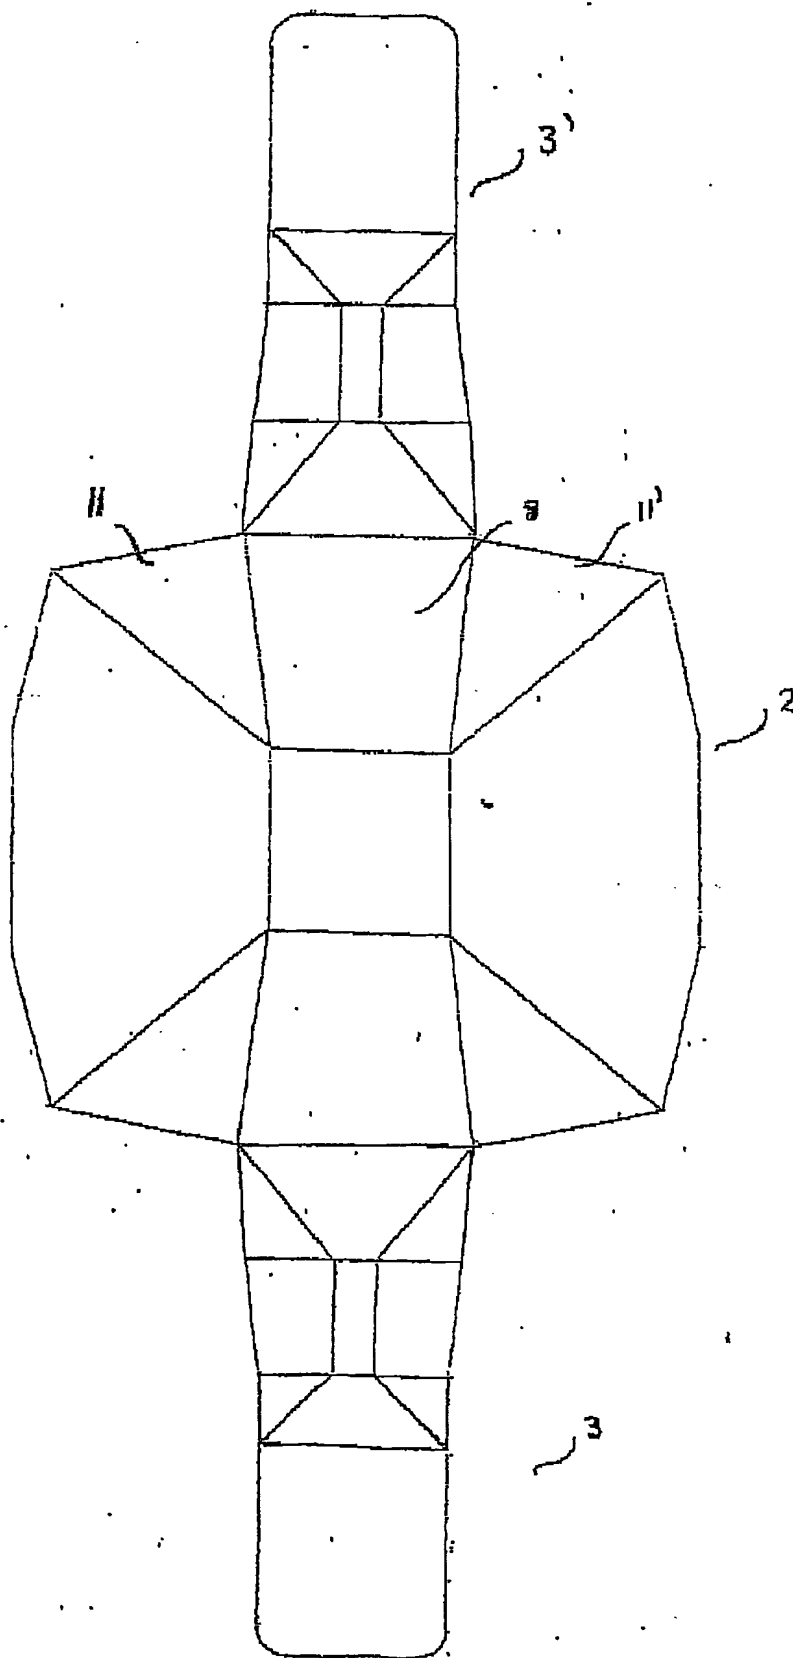


Fig 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.